
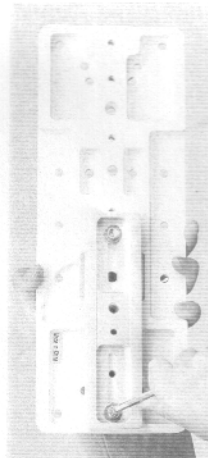


About the Dovetail Slide Bar

The position of the dovetail slide bar which is installed in the back of the SX accessory plate DX can be shifted back and forth by loosening the two W1/4 inch bolts.

Also, you can displace it to move to the front or rear position by using other W1/4 inch screw holes on the SX accessory plate DX as shown in the figure.

Note: When you attach the SX Accessory Plate DX onto the New ATLUX Mount, remove the dovetail slide bar and attach it directly with 4 pieces of the supplied M8 screws.

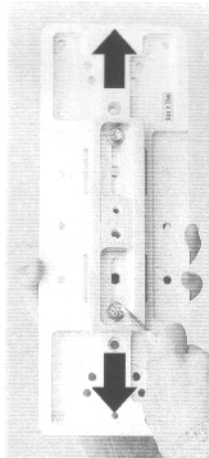

Vixen Co., Ltd.
5-17-3 Higashiokorozawa, Tokorozawa, Saitama359-0021, Japan
Phone +81-4-2944-4141(International)
<http://www.vixen.co.jp> F a x +81-4-2944-9722(International)

Preface

We thank you very much for your purchase of a Vixen SX Accessory Plate DX.

In this instruction manual, we don't refer to any parts or accessories that are available for the SX accessory plate DX as there is no specific direction to use. You can use it according to your need, but be sure to pay attention to the following matters.


- ① You should read instruction manuals for your telescope together with this manual.
- ② Limit the weights of all instruments attached to your telescope and the SX accessory plate DX itself to be within the maximum loading limit of the mount used.
- ③ Make sure that you securely tighten screws that are used to fix all instruments on the SX accessory plate DX. Loosened screws may cause problems.
- ④ Balance your telescope appropriately by adding or subtracting the counterweights according to the weight of your instrument. An additional counterweight may be required.

Available Vixen Mounts

The SX accessory plate DX is available for the SX, GP2, GPD2, New ATLUX and PORTA mounts. It is usable to mount sub scope, guide scope and/or various photographic accessories along with your optical tube. It can also be attached to old GP, GPD, ATLUX and CUSTOM-D mounts.


Vixen®

Instruction Manual for SX Accessory Plate DX

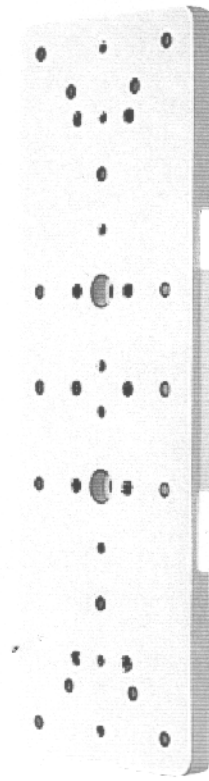


Contents

- ① SX Accessory Plate DX 1 pc.
- ② Dovetail Slide Bar (pre-installed) 1 pc.
- ③ W1/4 inch - 12mm bolt 4 pcs.
- ④ M6 - 12mm bolt 4 pcs.
- ⑤ M8 - 14mm bolt 4 pcs.
- ⑥ M8 - 40mm bolt with bar head ("T" bolt) 1 pc.
- ⑦ Allen wrench for M6 bolt 1 pc.
- ⑧ Allen wrench for M8 bolt 1 pc.
- ⑨ Allen wrench for W1/4 inch bolt 1 pc.

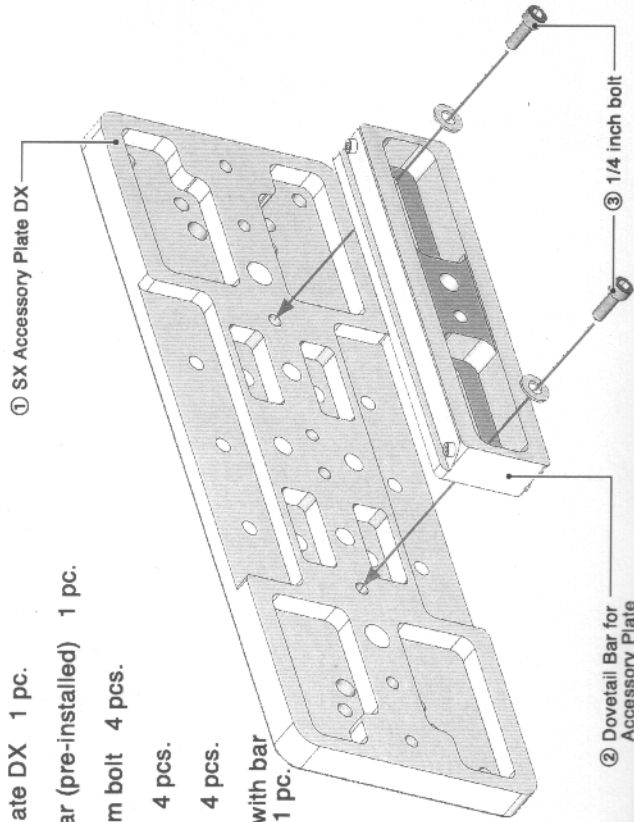

Arrangement of screw holes on the SX Accessory Plate DX

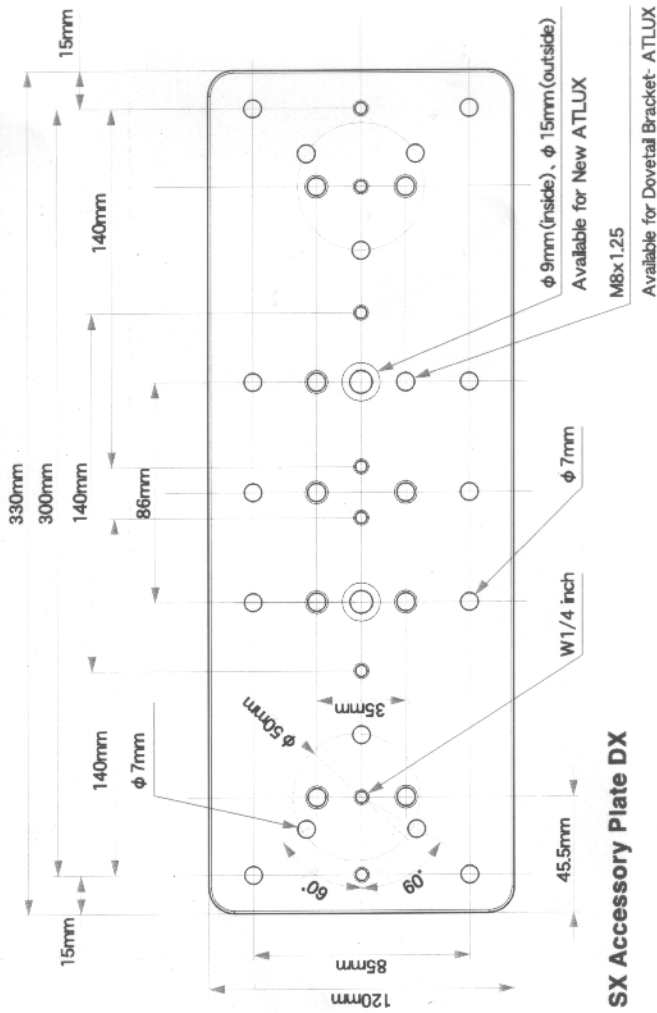


SX Accessory Plate DX

Dovetail Slide Bar


Total weight: 1275g

Attaching the SX Accessory Plate DX (Example: SX Mount)


① Loosen the dovetail tube-plate lock screw and safety screw.

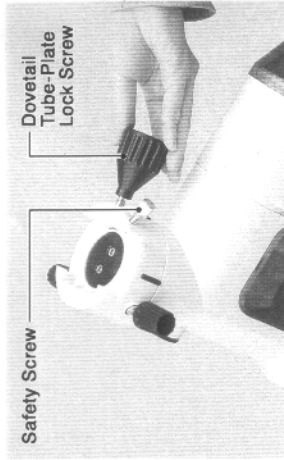

② Hold the SX accessory plate DX over the mount head so that the dovetail slide bar in its back is above the dovetail-plate attach system on the SX mount head. Place the SX accessory plate DX on the dovetail-plate attachment system and tighten the lock screw first. Then tighten the safety screw securely.

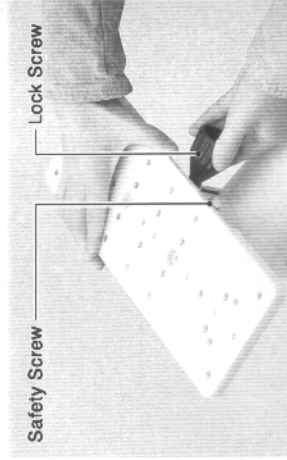

③ There may be little space to turn the knob of the lock screw because of the position of the SX accessory plate DX. In this case, exchange it for the supplied bolt with bar head shown in the figure right ("T" bolt).

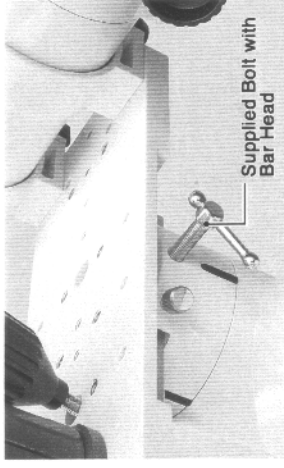

④ Now the SX accessory plate DX is ready to use. The figure right is an example.

